



CAT® L ft
Trucks

3,000-7,000 LB CAPACITY GAS, LP GAS, AND DIESEL PNEUMATIC TIRE LIFT TRUCKS

Quality

Reliability

Customer Service

MODEL	FUEL TYPE	RATED CAPACITY (lbs.)	ENGINE DISPLACEMENT (liters) GASOLINE/DIESEL
P3000	Gas/LP	3000	2.1 / -
P3500	Gas/LP	3500	2.1 / -
PC4000	Gas/LP	4000	2.1 / -
P4000	Gas/LP/Diesel	4000	2.5 / 3.3
P5000	Gas/LP/Diesel	5000	2.5 / 3.3
P5500	Gas/LP/Diesel	5500	2.5 / 3.3
P6000	Gas/LP/Diesel	6000	2.5 / 3.3
P6500	Gas/LP/Diesel	6500	2.5 / 3.3
P7000	Gas/LP/Diesel	7000	2.5 / 3.3

Our 3,000-7,000 lb capacity pneumatic tire lift trucks take Quality and Reliability to the next level, while providing all the Customer Service benefits you've come to expect from Cat® lift trucks. These rugged machines combine a new, contemporary look with a highly engineered design that delivers top horsepower and performance, for exceptional productivity.

Whether you're handling industrial materials or shipping products on a grueling schedule, these lift trucks work hard and long to get the job done right. To help reduce your life-cycle costs and maximize your uptime, service intervals have been extended to 500 hours.

Each of the models exceeds stringent Environmental Protection Agency (EPA) standards for reducing carbon monoxide (CO), hydrocarbons (HC), and nitrogen oxide (NOx) emissions, while delivering the power you need for workhorse performance. Operator comfort features, including a full suspension seat, are standard and many high-performance packages are available to tailor your lift truck to specific application requirements. From the manufacturing headquarters in Houston, Texas, using ISO 9001-2000 certified and independently audited quality control procedures, these lift trucks provide excellent long-term value and come with turnkey support from the industry's most trusted dealer network.

Everything
You've Come To Expect.





Powerfully Productive And Remarkably Versatile

This truck is equipped with powerful fuel-injected gasoline,

DIMENSIONS engines providing the horsepower and torque you need for the most challenging applications. If you're looking for exceptional productivity with maximum fuel efficiency, simply engage the Fuel Saver Mode. This softens the initial acceleration of the truck and minimizes fuel consumption by 14 percent while maintaining 95 percent of the truck's overall productivity. Another standard feature is Ground Speed Control. This feature allows you to customize the maximum travel speed of the truck to meet your application requirements without affecting overall performance. The benefits include reduced risk to pedestrian traffic, lower operating costs, enhanced engine

PERFORMANCE, as well as reduced risk of damaging loads, racks and trucks.



WEIGHT



CHASSIS

Comfortably Supportive

Comfort means productivity. A full suspension seat allows your operator to move in just about any direction, with forward, back, weight, and lumbar adjustments.

The robust and supportive design promotes comfort by resisting shock and vibration.

ELECTRICAL



Added Operator Protection


The advanced Cat Lift Trucks operator Presence Detection System (PDS) keeps your operator informed. When your operator leaves the normal seated operating position, the following occurs:

- Transmission is disengaged
- Power disconnects from hydraulic lift and tilt functions
- Parking brake alarm sounds if the operator has not applied the parking brake

When your operator returns to the normal seated operating position, a buzzer will sound to remind him to fasten his seat belt.

Operator Friendly

A tilt steering feature offers infinite adjustability within a 12-degree range of movement to comfortably accommodate most operators. A separate lever moves the column fully forward to provide easy access to the engine compartment. This feature also makes it easy for your operator to mount and dismount the truck. Afterwards, the memory recall will automatically return the column to your operator's preferred position.

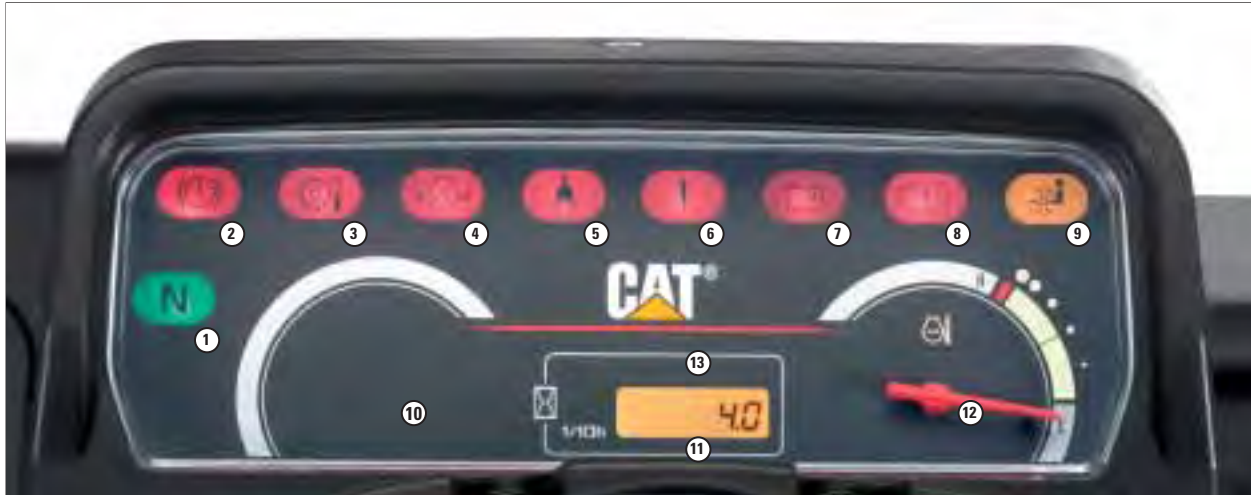

On The Alert

The standard engine protection system automatically reduces performance when engine oil pressure or coolant temperature reaches critical levels to protect your investment. A standard indicator package keeps the operator informed of operating conditions, and a back-up alarm is standard equipment.

Standard Indicator Package

1. Neutral indicator
2. Parking brake reminder/brake fluid level
3. Transmission oil lamp
4. Engine oil pressure
5. Seat belt warning
6. Engine status light
7. Alternator (battery charging)
8. Low LP fuel (standard for LP fuel only)
9. Mast/auxillary hydraulic function interlock
10. Fuel gauge (gasoline only)
11. Hour meter/diagnostic codes
12. Coolant temperature level
13. Engine protection system (not illuminated)





Clearly Better

Heavy-duty masts are designed and manufactured for lasting, dependable performance. Narrow mast channels and the efficient positioning and routing of chains and hoses help ensure a clear view forward. The truck's low-profile counterweight design provides good visibility to the rear, even with an LP tank in place. The overhead guard cross bar has been eliminated through a design that optimizes strength while improving visibility.



Easy Change

Changing LP tanks is now easier. A convenient, optional, swing-down bracket reduces operator effort while increasing productivity. A heavy duty gas cylinder helps to balance the weight of the LP tank and controls movement directions, ensuring near effortless operation.

Premium Performance

A wide array of option packages are available to maximize value. Options such as the integrated side shifter, shown here, are available. The newly designed side shifter offers excellent lifting capacity ensuring a clear view of the work area. Ask your Cat lift truck dealer for information.



EPA Compliant

Our new purePOWER™ engines are environmentally friendly. A highly efficient fuel system, with a tamper-proof design, meets or exceeds EPA durability requirements and is computer regulated to optimize fuel efficiency.

Extended Service Intervals

The 500-hour service interval and an easily accessible engine compartment make routine maintenance easy and convenient.



Exceptional Durability

Everything is optimized for performance, including the single-piece, fully cast, drive and steer axles, which protect vital components from damage and contaminants. A unitized frame offers great rigidity for durable performance in tough applications. The drive axle uses a full-floating design to minimize shocks and stresses, easily handling the high loading requirements of the most challenging work environments. A heavy duty counterweight grill is a standard feature on these trucks.

Quietly Smooth

To reduce noise and vibration, the transmission uses helical gears and a full-floating power train that isolates the engine and transmission from the frame and operator compartment. In addition, a hydraulic accumulator promotes smooth starts and direction changes, promoting operator efficiency while minimizing vibration. This workhorse transmission delivers all the durability you've come to expect from a Cat lift truck, while reducing frictional heat for lasting performance.



Prolonging Equipment Life

With advanced on-board diagnostics, it's never been easier to keep your vehicles running to peak performance. An on-board diagnostic system controls critical lift truck functions while making it easy to troubleshoot the system using a hand-held computer. The engine protection system automatically reduces power when coolant temperature suggests adverse operating conditions. A warning lamp on the instrument panel will alert the operator if engine oil pressure reaches a critical level.



Specifications


CHARACTERISTICS			P3000		P3500		PC4000				
1	Capacity	at rated load center	lb	kg	3000	1500	3500	1750	4000	2000	
2		at load center – distance	in	mm	24.0	500	24.0	500	24.0	500	
3	Power	electric, diesel, gasoline, LP gas	gasoline/LP gas		gasoline/LP gas		gasoline/LP gas				
4	Tire type	cushion, pneumatic	pneumatic		pneumatic		pneumatic				
5	Wheels (x=driven)	number front / rear	2x / 2		2x / 2		2x / 2				
DIMENSIONS											
10	Lift	maximum fork height with rated load	in	mm	162	4120	162	4120	162	4130	
11	Lift with standard two-stage mast	maximum fork height	in	mm	130	3320	130	3320	131	3330	
12		free fork height	in	mm	4.5	115	4.5	115	4.5	115	
13	Forks	thickness x length x width	in	mm	1.4 x 3.9 x 42	35 x 100 x 1070	1.4 x 3.9 x 42	35 x 100 x 1070	1.6 x 4 x 42	40 x 100 x 1070	
	Fork spacing	out-to out minimum / maximum	in	mm	7.9 / 36.2	200 / 920	7.9 / 36.2	200 / 920	7.9 / 36.2	200 / 920	
14	Tilt	forward / backward	deg		6 / 10		6 / 10		6 / 10		
15	Overall Dimensions	length to fork face	in	mm	89.0	2260	90.0	2295	92.5	2350	
16		width	with standard tires	in	mm	42.0	1065	42.0	1065	42.0	1065
17			w/ optional duals	in	mm	N/A	N/A	N/A	N/A	N/A	N/A
18		height	with lowered mast	in	mm	84.5	2140	84.5	2140	84.5	2140
19			seat height	in	mm	38.0	959	38.0	959	38.0	959
20			to top of overhead guard	in	mm	83.0	2100	83.0	2100	83.0	2100
		with extended mast	in	mm	180.0	4550	180.0	4550	180.0	4550	
21	Minimum outside turning radius		in	mm	77.0	1950	78.0	1980	79.5	2020	
22	Load moment constant		in	mm	15.7	400	15.7	400	16.3	415	
23	Minimum aisle – 90° stack – zero clearance w/out load		in	mm	96.5	2450	97.5	2480	100.0	2540	
PERFORMANCE											
40	Speeds	travel loaded / empty	mph	km/h	11.0 / 12.0	175 / 19.0	11.0 / 11.5	175 / 19.0	11.0 / 11.5	18.0 / 18.5	
41		lift speed loaded / empty	fpm	mm/s	120 / 125	620 / 630	120 / 125	620 / 630	120 / 125	620 / 630	
42		lowering speed loaded / empty	fpm	mm/s	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	
43	Drawbar pull	loaded (60 min. rating)	lb	N	3575	15,900	3550	15,700	3450	15,400	
		loaded maximum (5 min. rating)	lb	N	4125	18,300	4100	18,200	4000	17,800	
44	Gradeability	loaded at 1 mph (1.6 km)	%		40.0		39.0		33.0		
		maximum loaded/empty	%		40.1 / 18.4		39.7 / 16.0		38.8 / 14.4		
WEIGHT											
50	Empty		lb	kg	5500	2500	6000	2700	6600	3000	
51	Axle load	with rated load front / rear (est.)	lb	kg	7900 / 960	3575 / 440	8700 / 1140	3925 / 520	9600 / 1410	4375 / 640	
		without load front / rear (est.)	lb	kg	2430 / 3075	1110 / 1400	2330 / 3625	1060 / 1650	2350 / 4275	1070 / 1950	
CHASSIS											
60	Tire size	front, standard	in		6.50 x 10-10PR		6.50 x 10-10PR		6.50 x 10/5.00 Solid		
61		front, optional duals	in		N/A		N/A		N/A		
		rear	in		5.0 x 8-8PR		5.0 x 8-8PR		5.00 x 8/3.00 Solid		
62	Wheelbase		in	mm	55.0	1400	55.0	1400	55.0	1400	
63	Tread width	front, standard tires	in	mm	35.0	889	35.0	889	35.0	889	
64		front, optional duals	in	mm	N/A	N/A	N/A	N/A	N/A	N/A	
		rear tires	in	mm	35.5	901	35.5	901	35.5	901	
65	Ground clearance	at lowest point at mast	in	mm	4.3	110	4.3	110	4.3	110	
66		at center of wheelbase	in	mm	5.9	150	5.9	150	5.9	150	
67	Brakes	service	type		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		
68		parking	type		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		
ELECTRICAL											
80	Engine	model			K21		K21		K21		
81		continuous output S.A.E. gross	HP	kW	54.5	41.0	54.5	41.0	54.5	41.0	
			at r.p.m	2875		2875		2875			
82		maximum torque S.A.E. gross	lb-ft	Nm	110	150	110	150	110	150	
			at r.p.m	1600		1600		1600			
83	cylinder / displacement	cu in		cm ³	126	2065	126	2065	126	2065	
84	Transmission	type			Powershift		Powershift		Powershift		
85		number of speeds forward / reverse			1 / 1		1 / 1		1 / 1		
86	Relief pressure	for attachments at main	psi	bar	2625	185	2625	185	2625	185	
87	Noise level	mean value at operator's ear Leq	dB(A)		73.5		73.5		73.5		

P4000		P4000-D		P5000		P5000-D		P5500		P5500-D	
4000	2000	4000	2000	5000	2500	5000	2500	5500	2800	5500	2800
24.0	500	24.0	500	24.0	500	24.0	500	24.0	500	24.0	500
gasoline/LP gas		diesel		gasoline/LP gas		diesel		gasoline/LP gas		diesel	
pneumatic		pneumatic		pneumatic		pneumatic		pneumatic		pneumatic	
2x / 2		2x / 2		2x / 2		2x / 2		2x / 2		2x / 2	
162	4140	162	4140	162	4140	162	4140	178	4540	178	4540
131	3340	131	3340	131	3340	131	3340	130	3310	130	3310
5.5	140	5.5	140	5.7	145	5.7	145	5.9	150	5.9	150
1.6 x 4 x 42	40 x 100 x 1070	1.6 x 4 x 42	40 x 100 x 1070	1.6 x 4 x 42	40 x 100 x 1070	1.6 x 4 x 42	40 x 100 x 1070	1.8 x 5 x 42	45 x 100 x 1070	1.8 x 5 x 42	45 x 100 x 1070
8.7 / 39.4	220 / 1000	8.7 / 39.4	220 / 1000	8.7 / 39.4	220 / 1000	8.7 / 39.4	220 / 1000	9.8 / 39.4	250 / 1000	9.8 / 39.4	250 / 1000
6 / 10		6 / 10		6 / 10		6 / 10		6 / 10		6 / 10	
98.0	2490	98.0	2490	100.0	2550	100.0	2550	104.0	2645	104.0	2645
45.5	1150	45.5	1150	45.5	1150	45.5	1150	50.0	1275	50.0	1275
64.5	1640	64.5	1640	64.5	1640	64.5	1640	67.5	1715	67.5	1715
84.5	2140	84.5	2140	84.5	2140	84.5	2140	85.5	2170	81.0	2045
38.0	968	38.0	968	38.0	968	38.0	968	40.0	1018	40.0	1018
83.0	2105	83.0	2105	83.0	2105	83.0	2105	84.0	2125	84.0	2125
180.0	4570	180.0	4570	180.0	4570	180.0	4570	180.0	4540	180.0	4540
86.5	2200	86.5	2200	88.0	2230	88.0	2230	91.0	2315	91.0	2315
17.9	455	17.9	455	17.9	455	17.9	455	19.3	490	19.3	490
109.0	2760	109.0	2760	110.0	2790	110.0	2790	114.0	2910	114.0	2910
10.5 / 11.5	170 / 18.5	10.0 / 11.0	16.5 / 18.0	10.5 / 11.5	170 / 18.5	10.0 / 11.0	16.5 / 17.5	10.5 / 11.0	170 / 18.0	10.0 / 11.0	16.0 / 17.5
125 / 130	630 / 650	120 / 125	610 / 640	125 / 130	630 / 650	120 / 125	610 / 640	99 / 100	500 / 520	96 / 100	490 / 510
98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500
4225	18,800	4000	18,800	4175	18,600	3950	17,600	4175	18,500	3900	17,300
4800	21,300	4475	19,900	4750	21,100	4425	19,600	4750	21,100	4350	19,400
39.0		36.0		33.0		30.0		29.0		26.0	
40.2 / 18.8		40.4 / 18.7		37.8 / 16.4		34.2 / 16.4		33.0 / 16.9		29.7 / 16.9	
7300	3300	7500	3425	7900	3600	8100	3700	9100	4125	9300	4225
10,200 / 1450	4650 / 660	10,300 / 1590	4700 / 720	12,000 / 1470	5400 / 670	12,100 / 1620	5500 / 740	13,400 / 1700	6100 / 770	13,500 / 1840	6100 / 840
3200 / 4075	1460 / 1850	3300 / 4225	1500 / 1920	3175 / 4775	1440 / 2170	3250 / 4925	1480 / 2230	3650 / 5400	1660 / 2460	3725 / 5600	1700 / 2530
7.00 x 12-12PR		7.00 x 12-12PR		7.00 x 12-12PR		7.00 x 12-12PR		28 x 9 x 15-12PR		28 x 9-15-12PR	
7.00 x 12-12PR		7.00 x 12-12PR		7.00 x 12-12PR		7.00 x 12-12PR		28 x 9 x 15-12PR		28 x 9-15-12PR	
6.00 x 9-10PR		6.00 x 9-10PR		6.00 x 9-10PR		6.00 x 9-10PR		6.50 x 10-10PR		6.50 x 10-10PR	
63.0	1600	63.0	1600	63.0	1600	63.0	1600	64.0	1620	64.0	1620
38.0	961	38.0	961	38.0	961	38.0	961	42.0	1061	42.0	1061
47.5	1205	47.5	1205	47.5	1205	47.5	1205	47.5	1201	47.5	1201
38.5	978	38.5	978	38.5	978	38.5	978	38.5	981	38.5	981
4.6	117	4.6	117	4.6	117	4.6	117	5.4	136	5.4	136
6.3	159	6.3	159	6.3	159	6.3	159	7.0	178	7.0	178
foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic	
hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical	
K25		S4S		K25		S4S		K25		S4S	
58.0	43.5	56.5	42.0	58.0	43.5	56.5	42.0	58.0	43.5	56.5	42.0
2675		2250		2675		2250		2675		2250	
135	180	135	185	135	180	135	185	135	180	135	185
1600		1800		1600		1800		1600		1800	
152	2490	203	3330	152	2490	203	3330	152	2490	203	3330
Powershift		Powershift		Powershift		Powershift		Powershift		Powershift	
1 / 1		1 / 1		1 / 1		1 / 1		1 / 1		1 / 1	
2625	185	2625	185	2625	185	2625	185	2625	185	2625	185
76.5		75.5		76.5		75.5		76.5		75.5	

P6000		P6000-D		P6500		P6500-D		P7000		P7000-D	
6000	3000	6000	3000	6500	3300	6500	3300	7000	3500	7000	3500
24.0	500	24.0	500	24.0	500	24.0	500	24.0	500	24.0	500
gasoline/LP gas		diesel		gasoline/LP gas		diesel		gasoline/LP gas		diesel	
pneumatic		pneumatic		pneumatic		pneumatic		pneumatic		pneumatic	
2x / 2		2x / 2		2x / 2		2x / 2		2x / 2		2x / 2	
171	4360	171	4360	179	4550	179	4550	179	4550	179	4550
130	3310	130	3310	131	3350	131	3350	131	3350	131	3350
5.9	150	5.9	150	5.9	150	5.9	150	5.9	150	5.9	150
1.8 x 5 x 42	45 x 100 x 1070	1.8 x 5 x 42	45 x 100 x 1070	2 x 5 x 42	50 x 125 x 1070	2 x 5 x 42	50 x 125 x 1070	2 x 5 x 42	50 x 125 x 1070	2 x 5 x 42	50 x 125 x 1070
9.8 / 39.4	250 / 1000	9.8 / 39.4	250 / 1000	9.8 / 39.4	250 / 1000	9.8 / 39.4	250 / 1000	9.8 / 39.4	250 / 1000	9.8 / 39.4	250 / 1000
6 / 10		6 / 10		6 / 10		6 / 10		6 / 10		6 / 10	
107.0	2720	107.0	2720	108.0	2750	108.0	2750	110.0	2790	110.0	2790
50.0	1275	50.0	1275	50.0	1275	50.0	1275	51.0	1290	51.0	1290
67.5	1715	67.5	1715	67.5	1715	67.5	1715	67.5	1715	67.5	1715
85.5	2170	85.5	2170	85.5	2170	85.5	2170	91.0	2300	91.0	2500
40.0	1018	40.0	1018	40.0	1018	40.0	1018	40.0	1018	40.0	1018
84.0	2125	84.0	2125	84.0	2125	84.0	2125	84.5	2140	84.5	2140
179.0	4540	179.0	4540	180.0	4540	180.0	4540	180.0	4570	180.0	4570
94.0	2380	94.0	2380	96.0	2430	96.0	2430	96.0	2440	96.0	2440
19.3	490	19.3	490	19.3	490	19.3	490	19.3	490	19.3	490
117.0	2970	117.0	2970	119.0	3020	119.0	3020	119.0	3030	119.0	3030
10.5 / 11.0	170 / 18.0	10.0 / 11.0	16.0 / 17.5	11.0 / 11.5	17.5 / 18.5	10.5 / 11.5	16.5 / 18.0	11.0 / 11.5	17.5 / 18.5	10.0 / 11.5	16.5 / 18.0
99 / 100	500 / 520	96 / 100	490 / 510	99 / 100	500 / 520	96 / 100	490 / 510	83 / 86	420 / 440	80 / 85	410 / 430
98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500	98 / 98	500 / 500
4150	18,400	3875	17,200	3975	17,700	3700	16,400	3950	17,600	3675	16,300
4725	21,000	4325	19,300	4500	20,100	4134	18,400	4489	20,000	4110	18,300
27.0		25.0		23.7		21.7		22.5		20.6	
30.9 / 17.3		27.7 / 17.3		27.1 / 17.3		24.3 / 17.3		25.8 / 14.8		23.2 / 14.9	
9300	4250	9600	4350	10,000	4575	10,300	4675	10,200	4650	10,500	4775
14,300 / 1670	6500 / 760	14,400 / 1810	6500 / 820	15,100 / 2130	6900 / 970	15,200 / 2270	6900 / 1030	15,900 / 2060	7200 / 930	16,000 / 2200	7300 / 1000
3825 / 5500	1730 / 2525	3900 / 5700	1780 / 2575	3750 / 6300	1700 / 2875	3825 / 6400	1740 / 2925	3675 / 6600	1670 / 2975	3775 / 6700	1720 / 3050
28 x 9-15-12PR		28 x 9-15-12PR		28 x 9-15-12PR		28 x 9-15-12PR		250 x 15-16PR		250 x 15-16PR	
28 x 9-15-12PR		28 x 9-15-12PR		28 x 9-15-12PR		28 x 9-15-12PR		250 x 15-16PR		250 x 15-16PR	
6.50 x 10-10PR		6.50 x 10-10PR		6.50 x 10-10PR		6.50 x 10-10PR		6.50 x 10-12PR		6.50 x 10-12PR	
67.0	1700	67.0	1700	67.0	1700	67.0	1700	z.0	1700	67.0	1700
42.0	1061	42.0	1061	42.0	1061	42.0	1061	42.0	1061	42.0	1061
47.5	1201	47.5	1201	47.5	1201	47.5	1201	47.5	1201	47.5	1201
38.5	981	38.5	981	38.5	981	38.5	981	38.5	981	38.5	981
5.4	136	5.4	136	5.4	136	5.4	136	5.4	136	5.4	136
7.0	178	7.0	178	7.0	178	7.0	178	7.0	178	7.0	178
foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic	
hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical		hand-operated, mechanical	
K25		S4S		K25		S4S		K25		S4S	
58.0	43.5	56.5	42.0	58.0	43.5	56.5	42.0	58.0	43.5	56.5	42.0
2675		2250		2675		2250		2675		2250	
135	180	135	185	135	180	135	185	135	180	135	185
1600		1800		1600		1800		1600		1800	
152	2490	203	3330	152	2490	203	3330	152	2490	203	3330
Powershift		Powershift		Powershift		Powershift		Powershift		Powershift	
1 / 1		1 / 1		1 / 1		1 / 1		1 / 1		1 / 1	
2625	185	2625	185	2625	185	2625	185	2625	185	2625	185
76.5		75.5		76.5		75.5		76.5		75.5	

NOTE: These specifications assume the use of drive axles, tires and tilt angles specified. Any modification to specifications, or any other combination of specifications made after the shipment of the truck, requires prior written approval from Mitsubishi Caterpillar Forklift America Inc. ("MCFA"). (See ASME B56.1 Part II 4.2.) Also be advised that overall operating visibility may be affected by the mast configuration and mast options of your truck. Therefore, you may need to add ancillary [auxiliary] devices or modify your operating practices. Consult your dealer for further information.

Call-out numbers shown in the diagram below correspond to the first column of the specifications chart.

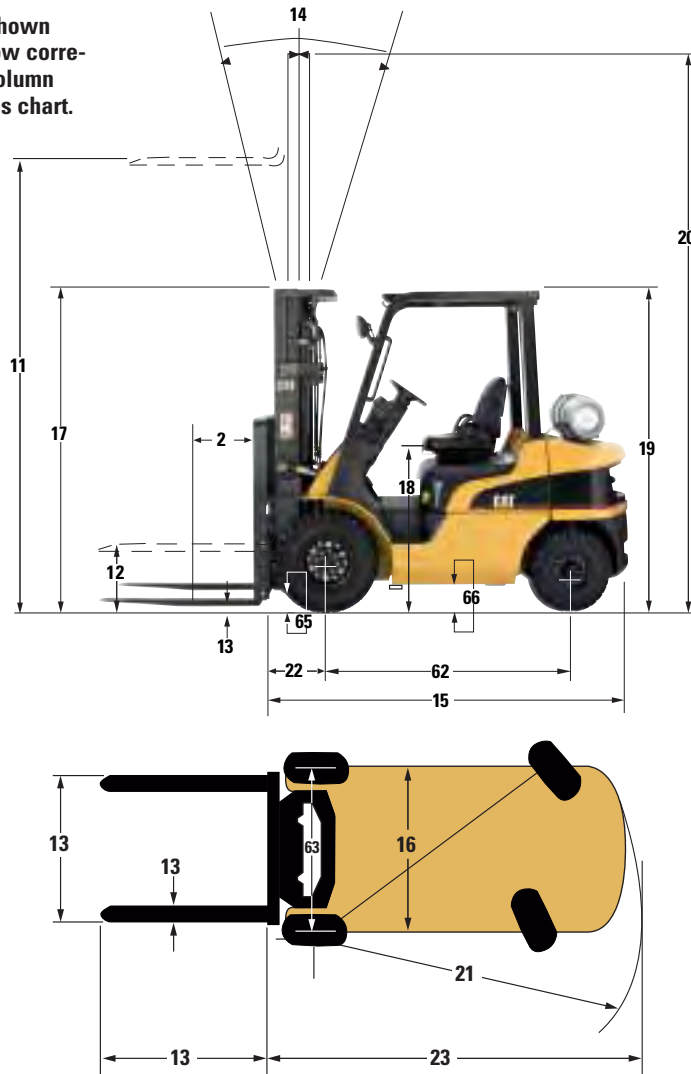

SAFETY STANDARDS

These trucks meet American Society of Mechanical Engineers (ASME) B56.1, part III Safety Standards for powered industrial trucks.

UL-Classified by Underwriters Laboratories, Inc., as to fire and electric shock hazard only. Availability: Types G, LP and D standard. Types GS, LPS and DS optional.

Users should be aware of, and adhere to, applicable codes and regulations regarding operator training, use, operation, and maintenance of powered industrial trucks, including:

- ASME B56.1, part II.
- NFPA 505, fire safety standard for powered industrial trucks - type designations, areas of use, maintenance, and operation.
- Occupational Safety and Health Administration (OSHA) regulations that may apply.

Contact your Cat lift truck dealer for further information including operator training programs and auxiliary visual and audible warning systems, fire extinguishers, etc., as available for specific user applications and requirements.

Specifications, equipment, technical data, photos, and illustrations based on information at time of printing and subject to change without notice. Some products may be shown with optional equipment.

Expanding Your Capabilities

Cat Lift Trucks offers an exciting selection of application-supportive options to meet the special needs of:

- General construction
- Oil industry
- Building and garden material handling
- Fabricated and primary metal industries
- Chemical industry and allied products
- Stone, glass, and clay handling
- Industrial machinery and equipment businesses
- Food processing and bottling industries
- Paper industry
 - Stevedoring
 - Warehousing

Options that maximize the value and productivity of the P3000-P7000 lb capacity Cat lift trucks include:

- Integral side shifter
- Tilt leveling
- Swing-down LP tank bracket
- Service indicator package
- Foundry/Brick package
- Cotton/Fiber package

Ask your Cat lift truck dealer to help you select the right truck and option package for your specific application requirements.



Ask For A Demonstration

Cat lift trucks deliver Quality and Reliability, with Customer Service advantages that guarantee a lasting return on your investment. Ask your Cat lift truck dealer for a demonstration today.

Quality

Reliability

Customer Service

Everything
You've Come To Expect.

Unlimited Hours Warranty covers parts and labor for one year, regardless of service hours.

Parts Fast or Parts Free Guarantee ensures next-business-day availability (at dealer's location) of parts for all brands of lift trucks or they are free, including freight.

Free Loaner Service Guarantee provides a lift truck until the repair is done if your lift truck is not repaired right the first time and within the quoted time.

Contact your Cat lift truck dealer for complete terms and conditions of these guarantees.

Cat Lift Trucks offers an extensive range of products and services. Your Cat lift truck dealer can provide options and additional visual and audible warning devices geared toward your specific applications and requirements. Operator training programs are also available to boost productivity and to help reduce the potential for product damage and personal injury.

Your Cat lift truck dealer can also provide a variety of financing and leasing options to suit the needs of your business.



Copyright © 2006 by MCFA. CAT, CATERPILLAR, their respective logos and "Caterpillar Yellow," as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. All registered trademarks are the property of their respective owners. Printed in U.S.A.

CAT® Lift
Trucks

1-800-CAT-LIFT
www.cat-lift.com